


NEW! ThermaCAM® GasFindIR™ LW

Easily Sees Sulfur Hexafluoride!



GasFindIR LW Technical Specifications

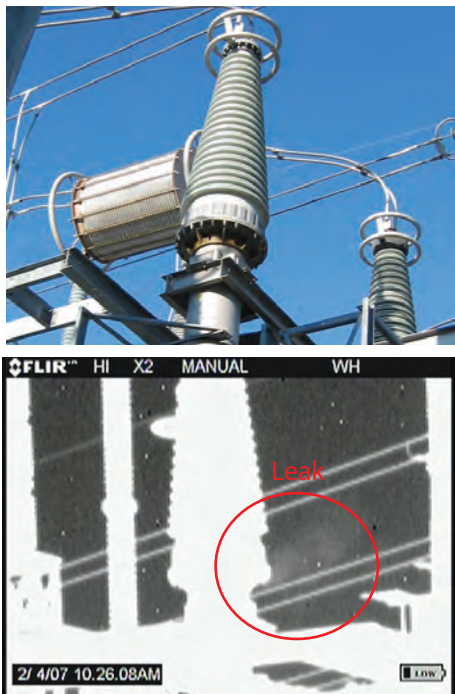

- 320x240 QWIP
- <35mK NETD
- 10.5µm Center band at 60K
- FLIR MC-3 Microcooler
- Digital serial interface (RS-232/422)
- Simple direct access buttons for frequently used functions
- High Resolution 320 x 240 OLED Viewfinder
- External NTSC/PAL standard video
- Optical Interface
- 25mm F/2.0 lens, 22 FOV
- 50mm F/2.0 lens, 11° FOV
- 100 mm F/2.0 telescope, 5.5° FOV
- External NUC
- Manual focus
- 1/4 - 20 Tripod interface
- Size: < 10" (L) x 6" (W) x 5" (H)
- Weight: <4.0 lbs.
- One (1) hand operation
- Three (3) settings for variable integration times
- Selectable histogram equalizations

A Major Innovation for the Utility Industry!

